



ACETECH
ARCHITECTURAL

42 Lisbon Street, Fairfield East NSW 2165

Tel: (02) 9724 5566

Email: sales@acetecharch.com.au

www.acetecharch.com.au

Acetech WPC Wall cladding

Installation manual

Version 2, November 2024

Note:

This installation manual is provided as guide only . The installation of wpc wall cladding should be carried out by person who is experienced in such trade. Any use of details shown here is at your own risk and discretion.


The wall cladding can be installed either vertically or horizontally. In either direction, the distance between joists is suggested no more than 400 mm.

Vertical installation:




Horizontal installation:




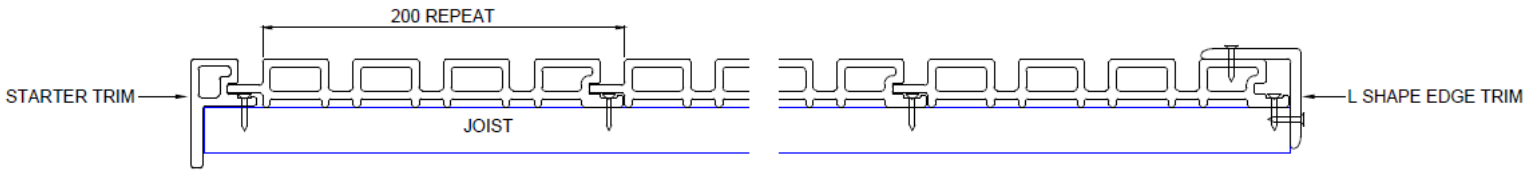

Plan detail - general

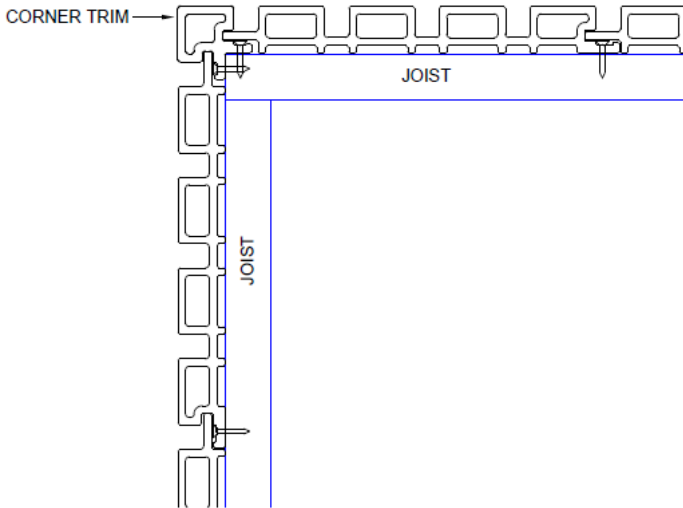

External corner detail

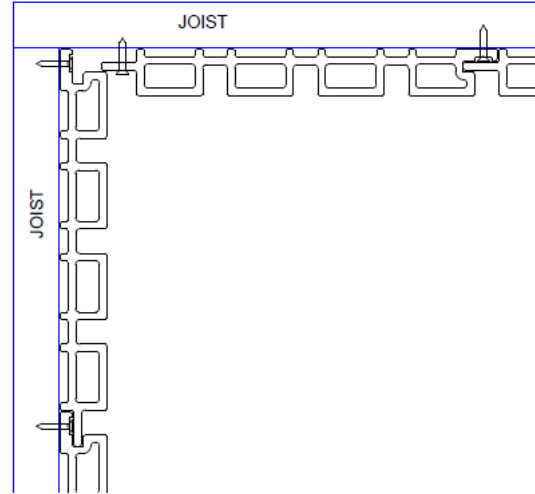

Internal corner detail

Caution: the screw head must rest on the cladding board, but don't exert any force on it, which could lead to cracking

Recommended screws: Stainless steel or galvanized 6 gauge self drive screw with 7 mm head diameter or less (waferhead or similar)

The panels can also be fixed with external use liquid nails, please consult supplier for suitability of use.



Replacement of a board

If any panel in the middle got damaged, cut the panel by sides and replace it with new panel of the same size (after cutting). Place it in between and drive screws from slots.

